



HB13(GLK) LED HIGH BAY LIGHT

www.seekingled.com





UGR < 19 CIE190:2010


HB13(GLK) high bay light provides a solution for Indoor sports venues, airport waiting rooms, car sales centers, large supermarkets, exhibition centers. Low glare design, glare value UGR<19 (CIE190:2010). Protection level up to IK09 and IP69K. Constant Current Power Driver, L80B20 can reach more than 100,000 hours.



Dimension

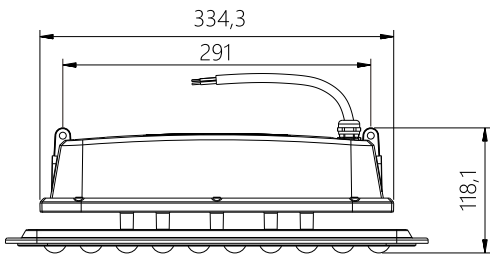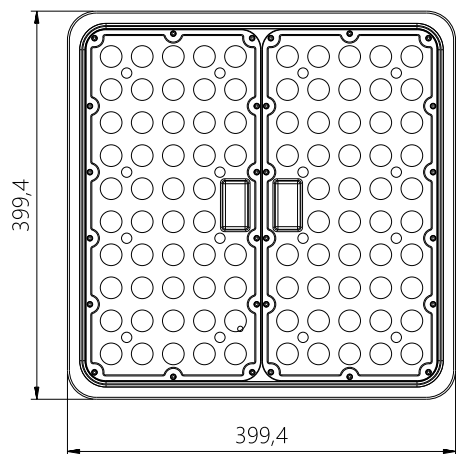

Power&color regulation / Power regulation




Parameter

Model NO.	Power (W)	Luminous Flux 170lm/W
XJ-GLK80W	80	13600
XJ-GLK100W	100	17000
XJ-GLK150W	150	25500
XJ-GLK200W	200	34000
XJ-GLK240W	240	40800

Above lumens based on 4000K Ra:80

AC Input : 100-277V 50/60Hz
Brand of LED Driver : MEANWELL / MOSO
Light Source : 2835
CRI Range : Ra>80
CCT Range : NW(4000K) CW(5700K)
WW(3000K)(Optional) DW(5000K)(Optional)
Light Efficiency : 170±5% Lm/W
Beam Angle : 90°
Housing : Aluminum Alloy
Waterproof : IP69K & IK09
L80B20@25°C : >100000H
PF:≥0.95 THD<15% Power Efficiency:≥0.9
Certifications: TUV, CE, CB, ETL, FCC, SAA
Warranty : 5 Years


Light distribution curve



90°




Package

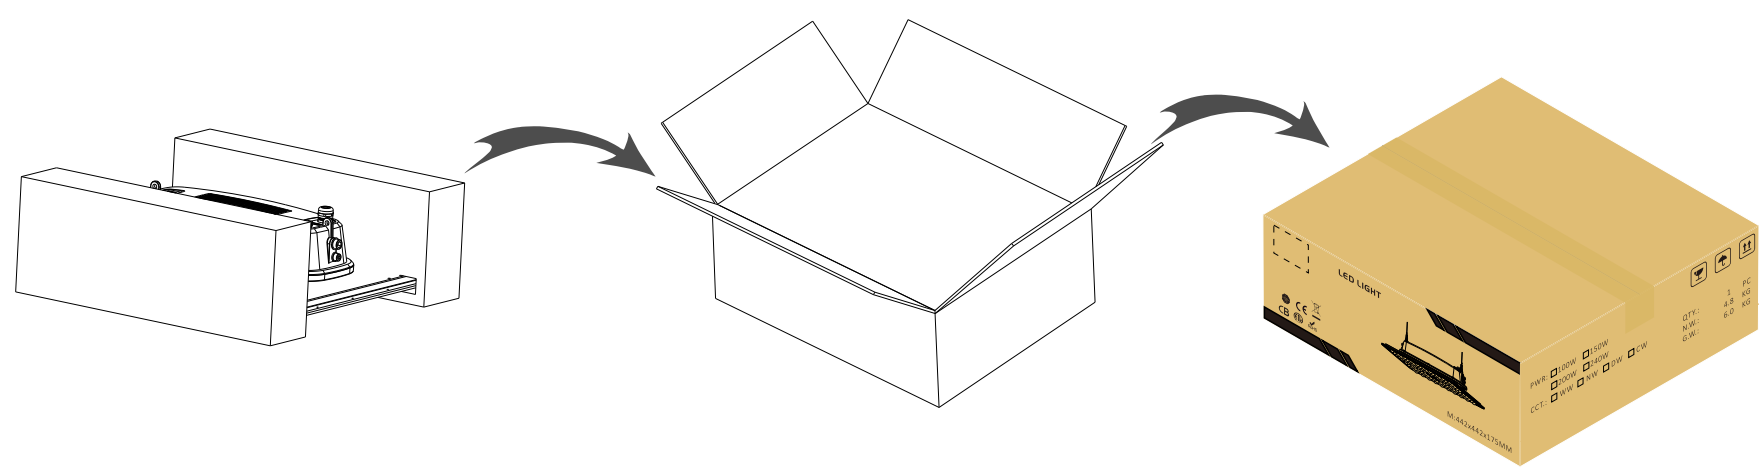







Model	Qty.	N.W.(kg)	G.W.(kg)	Meas(mm)
XJ-GLK*	1Pc/ctn	4.8	6.0	442x442x175

Mounting accessories

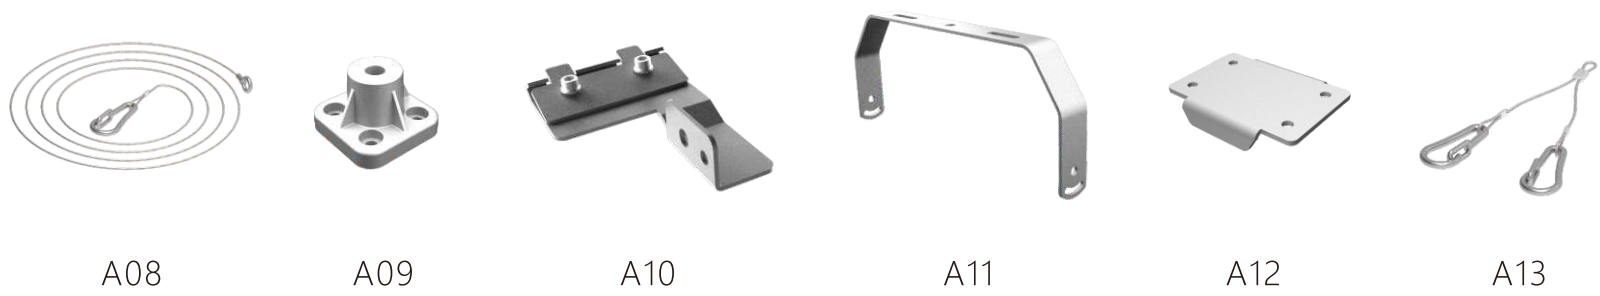

accessories	image	material	dimensions	weight	accessory use
Optional	A08	SUS304	Ø2.0x1000mm	0.04kg	Suspension installation
Optional	A09	ADC12	M10	0.05kg	Hanging pipe installation
Optional	A10	carbon steel	76.5x25x115mm	0.15kg	Steel wire installation
Optional	A11	carbon steel	318x133x32mm	0.38kg	Bracket installation
Optional	A12	carbon steel	66x50x10mm	0.06kg	Fixation of lamp bridging
Optional	A13	SUS304	Ø2.0x300mm	0.04kg	Suspension installation

Installation

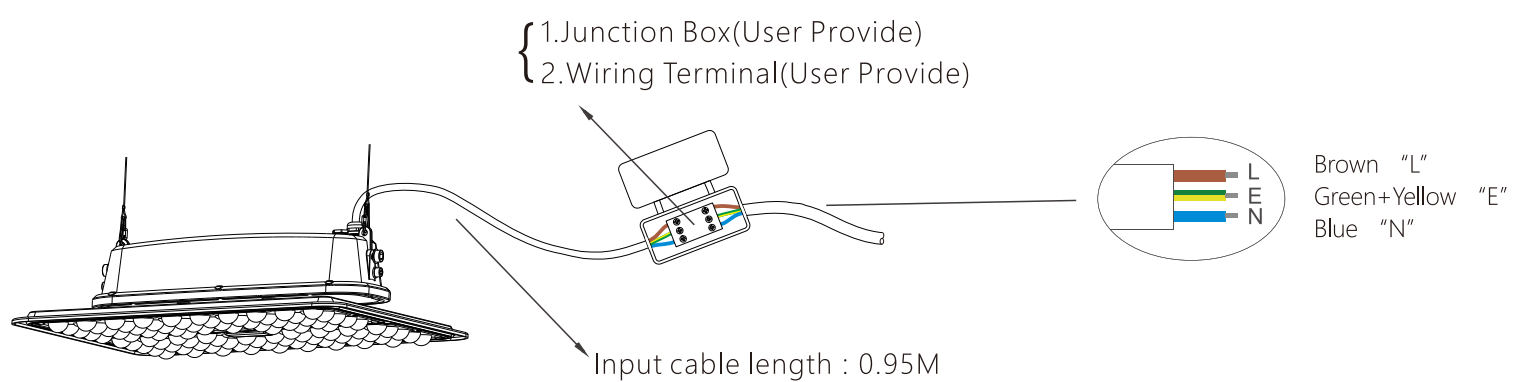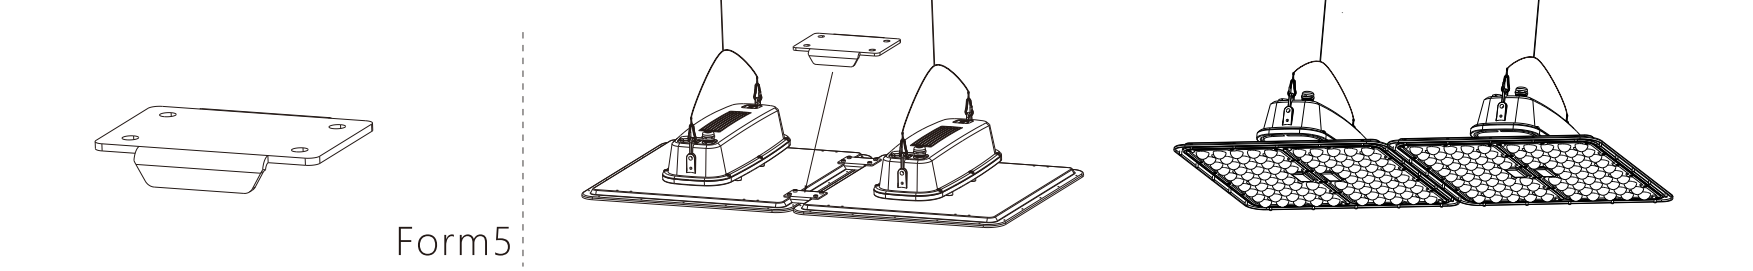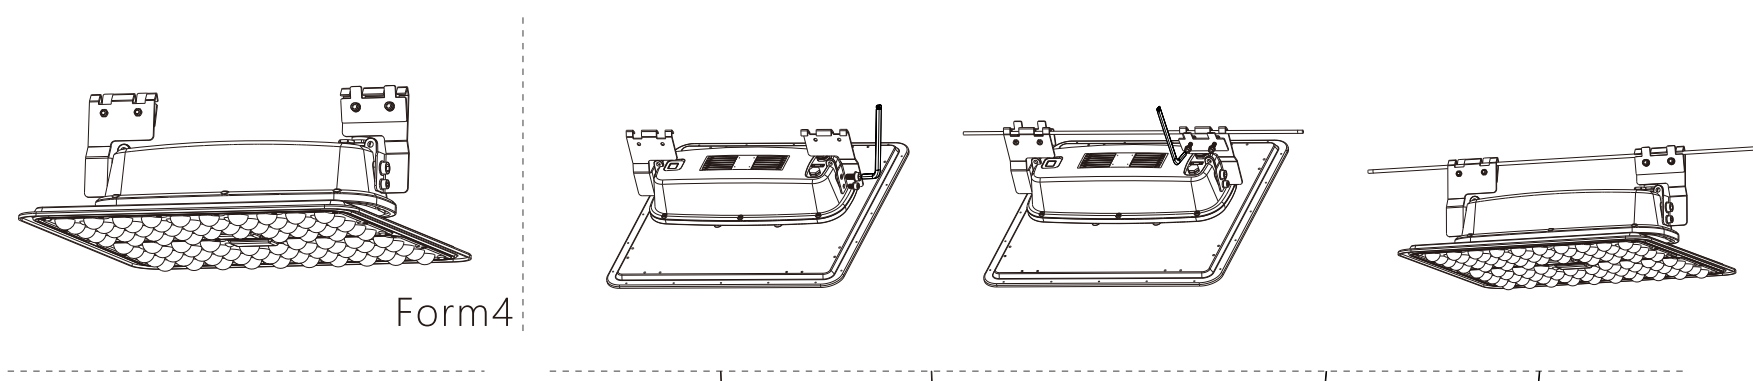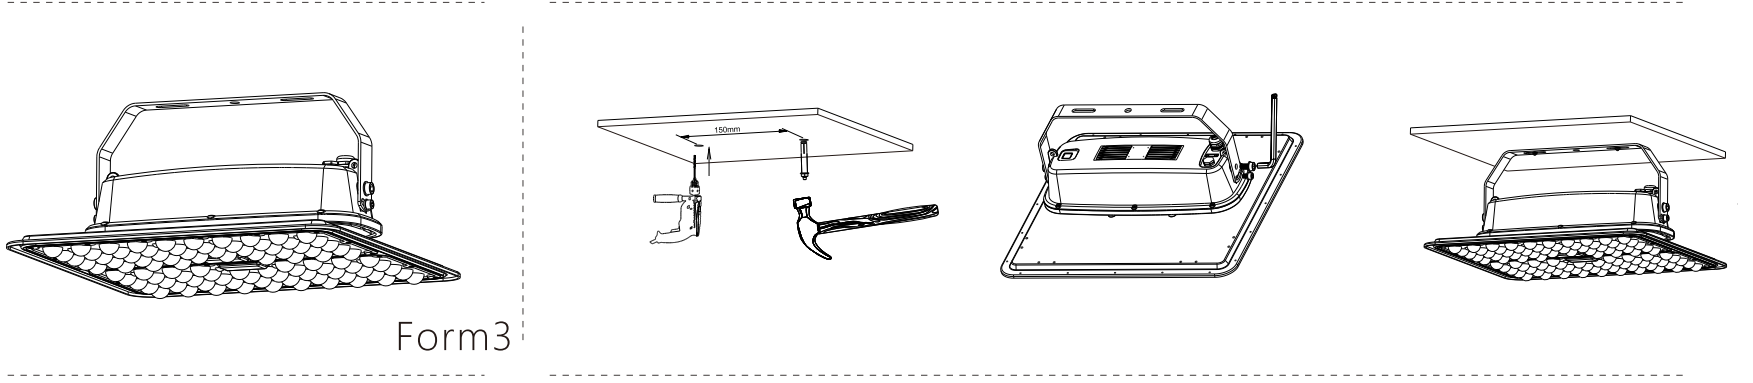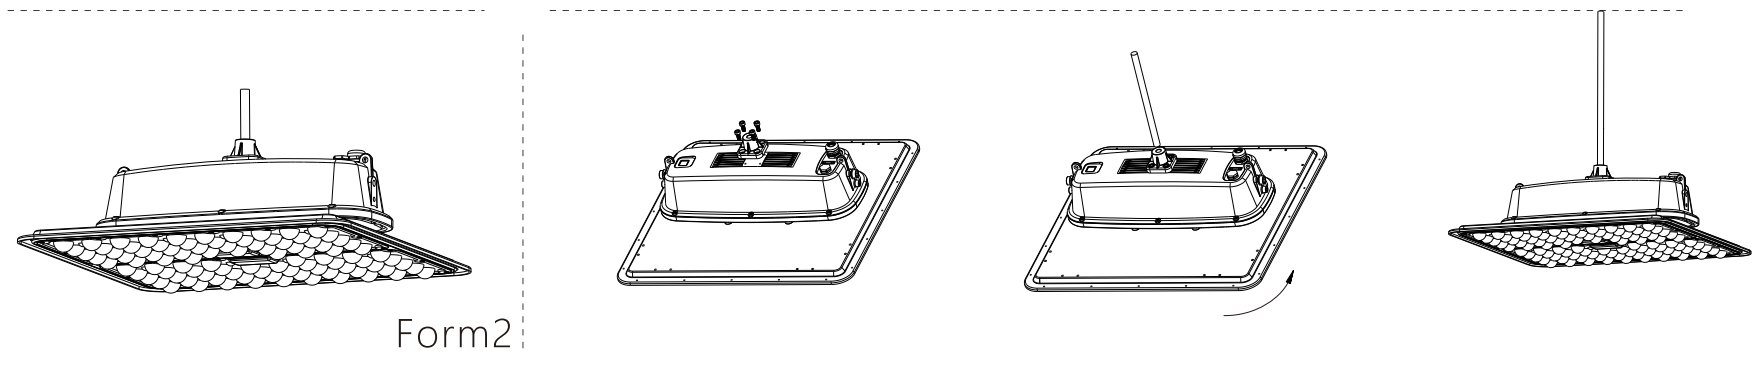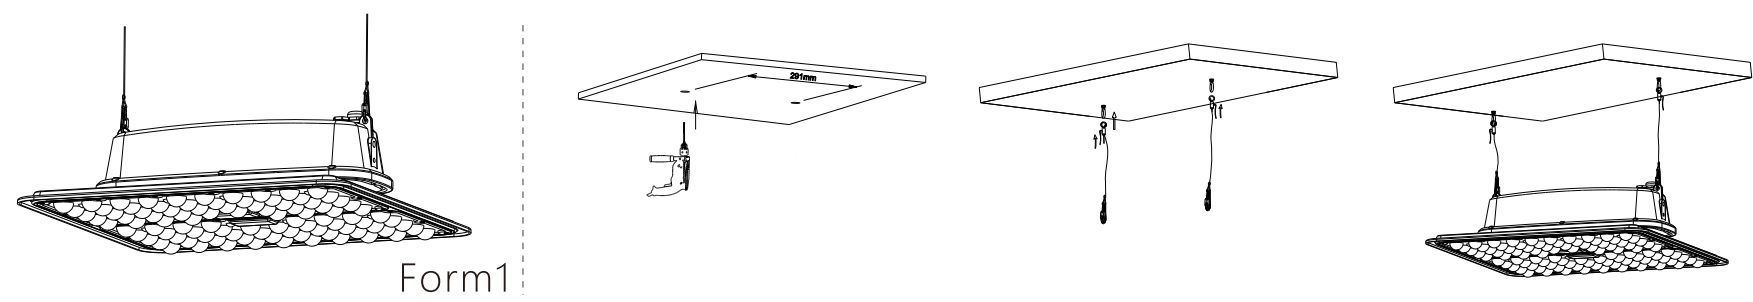

Note : Please make sure the power off before opertion, Installation must be performed by skilled electrician who are familiar with the requirements and proper installation methods of LED luminaire. In order to avoid damage or hazard; The external fxible cable or cord of this luminaire can not be replaced, if the cord is damaged, the luminaire must be destroyed.
The light source contained in this luminaire shall only be replaced by a qualified person.