



FLD SERIES LED FLOOD LIGHT



www.seekingled.com




170lm/w 480W/720W/960W 15°/30°/60°/90°/P50

FLD series flood light provides a solution for recreational sports and area lighting, Provides a variety of different angles of light distribution design to meet the lighting needs of different occasions. High power design, simplified lighting design for large venues, Protection level up to IK08 and IP66. Constant Current Power Driver, L80B20 can reach more than 100,000 hours.




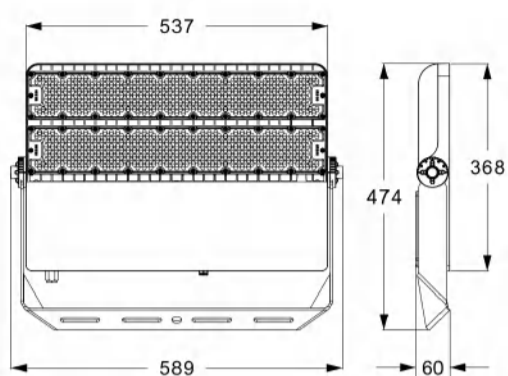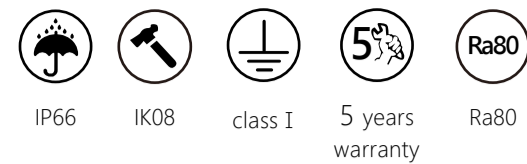

XJ-FLD400W
XJ-FLD480W

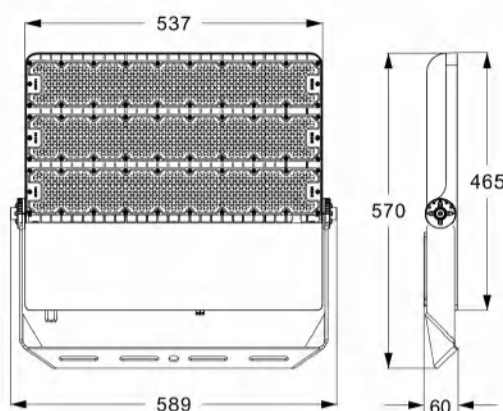

XJ-FLD600W
XJ-FLD720W

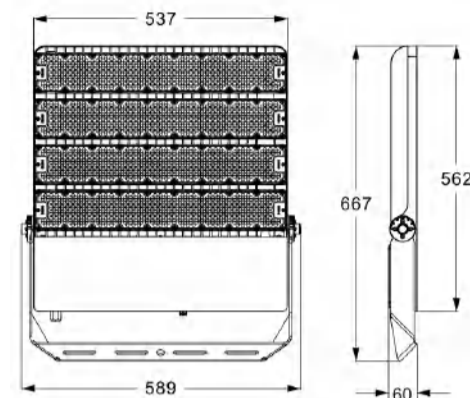


XJ-FLD800W
XJ-FLD960W

Parameter

Model NO.	Power (W)	Luminous flux 170lm/w
XJ-FLD400W	400W	68000
XJ-FLD480W	480W	81600
XJ-FLD600W	600W	102000
XJ-FLD720W	720W	122400
XJ-FLD800W	800W	136000
XJ-FLD960W	960W	163200

AC Input :	100-277V 50/60Hz
Brand of LED Driver :	SOSEN/MEAN WELL
Light Source :	2835
CRI Range :	Ra>80
CCT Range :	NW(4000K) CW(5700K)
Light Efficiency :	170+5% Lm/W
Beam Angle :	15°/30°/ 60°/90°/ P50
Housing :	Aluminum Alloy
Surge Protection :	10kV
Waterproof :	IP66 & IK08
L80B20@25°C:	>100000H
PF:	≥0.95
THD:	<15%
Power Efficiency:	≥0.9
Certifications:	CE, CB
Warranty :	5 Years
Light body color:	White Aluminum(RAL 9006)

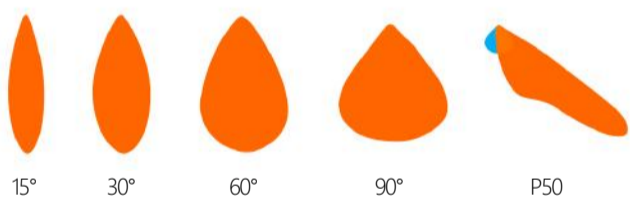

XJ - FLD 960W

- Power Code: 400W/480W/600W
720W/800W/960W
- product series
- Seeking LED-Lighting



Dimmable

★ Above lumens based on 4000K Ra:80

Mounting accessories:




A06



A07


accessories	image	material	dimensions	weight	accessoryuse
Optional	A06	Aluminium	Φ30x120mm	200g	Lamp angle positioning
Standard	A07	SUS304	Φ5x1000mm	0.6kg	Increase the safety performance

Product Packaging :

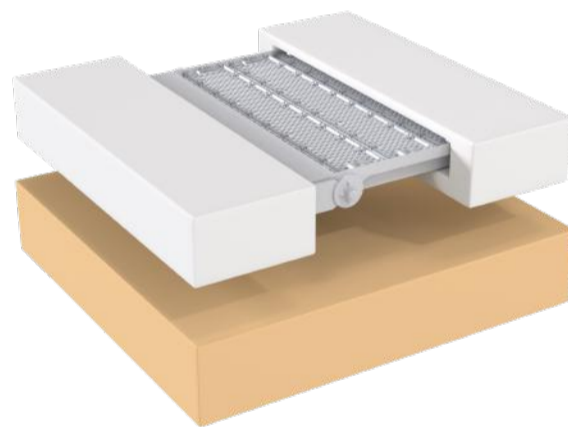


Model	Qty	N.W.(kg)	G.W.(kg)	Meas(mm)
XJ-FLD400W XJ-FLD480W	1PC/ctn	9.4	10.6	610x500x80
XJ-FLD600W XJ-FLD720W	1PC/ctn	10.8	12.3	610x590x80
XJ-FLD800W XJ-FLD960W	1PC/ctn	12.2	14.2	690x610x80

Installation method:

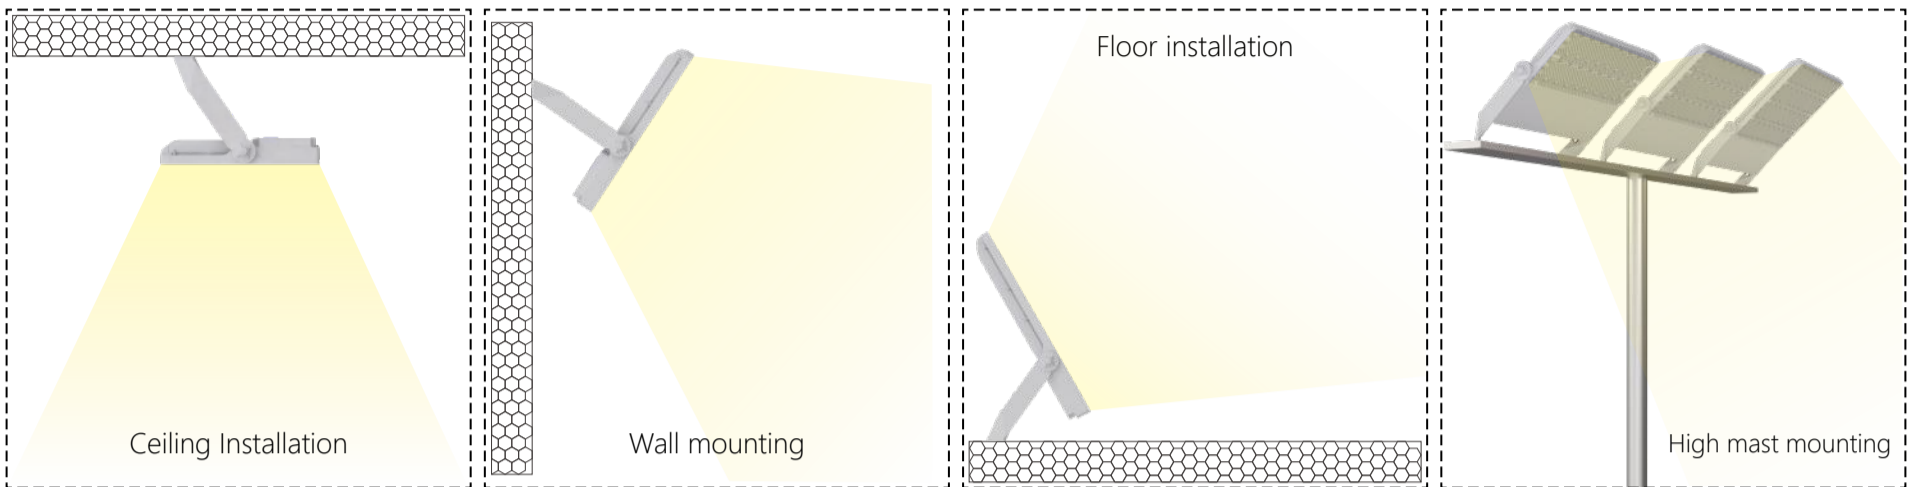

Product Installation Instructions:

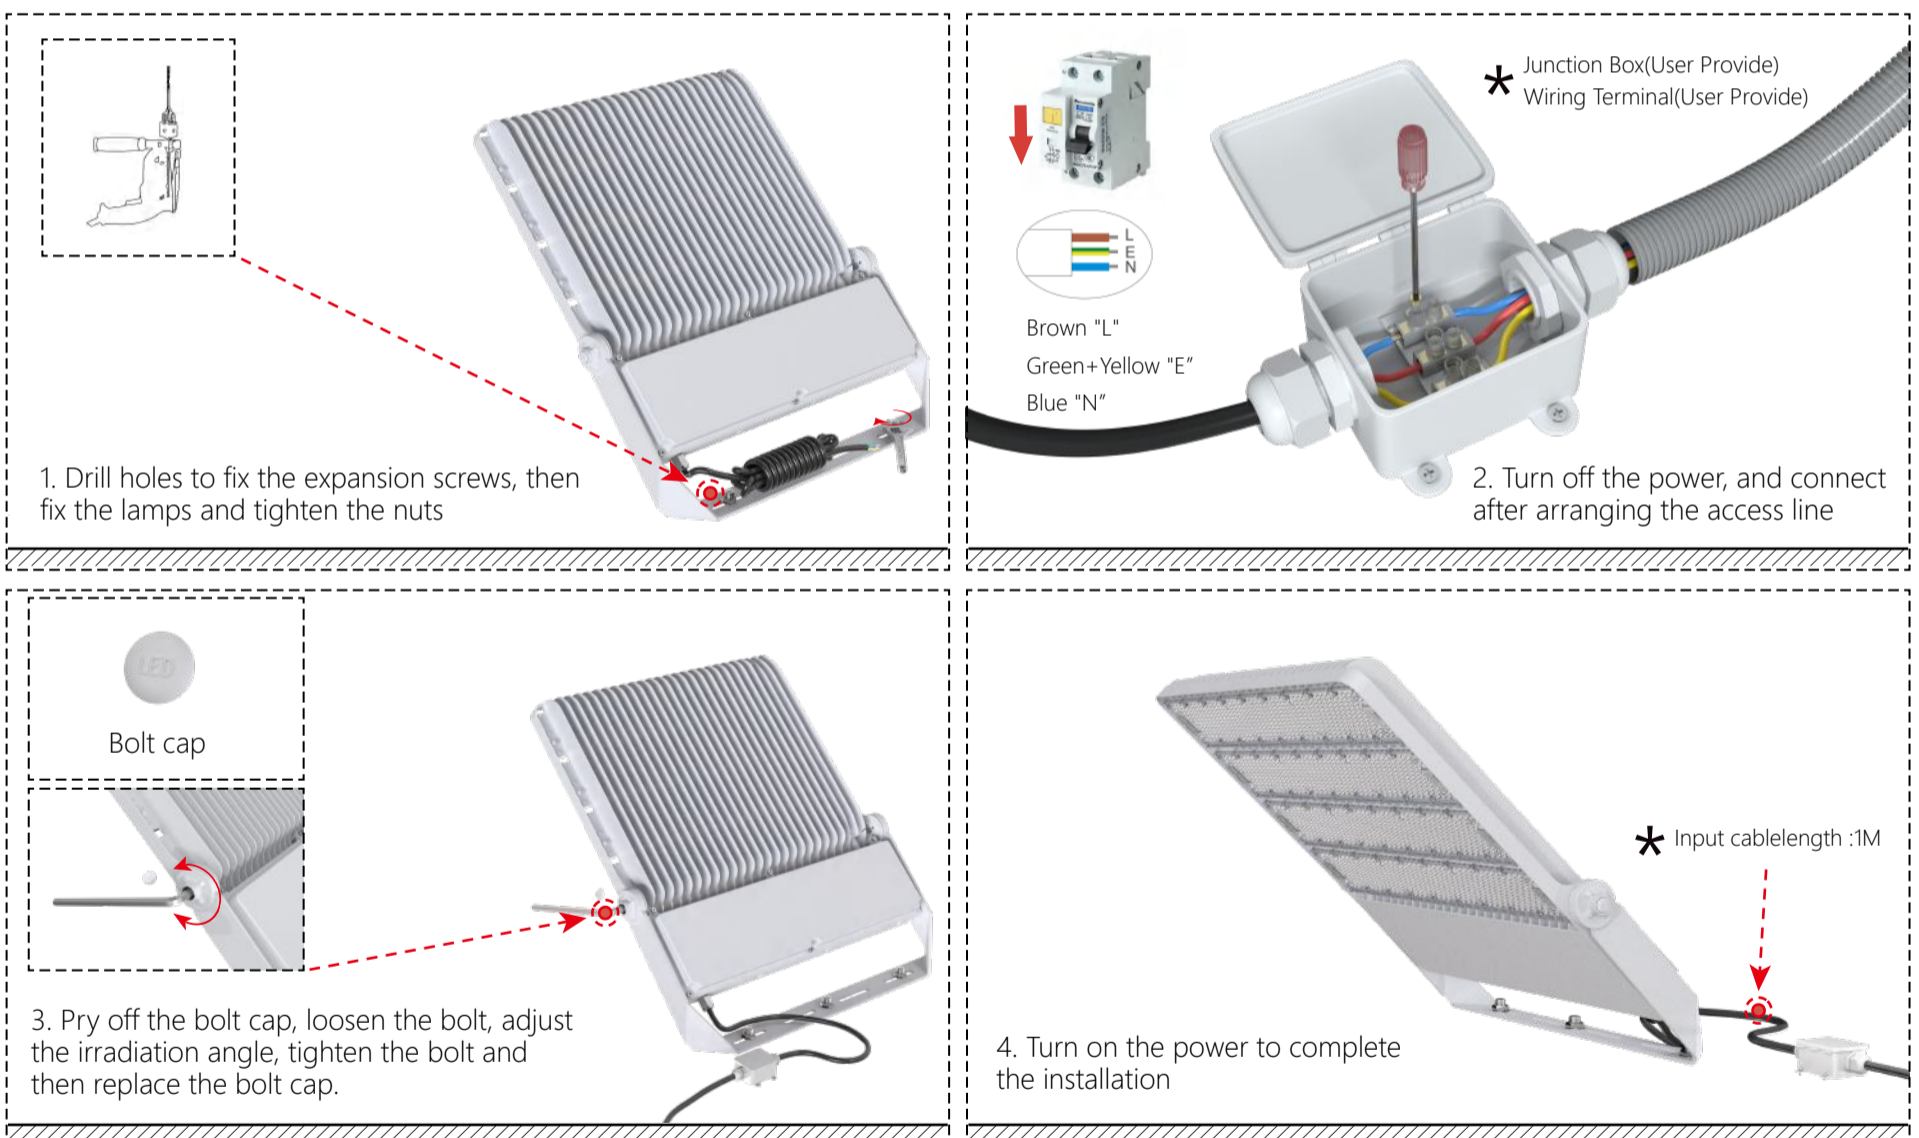

* Note : Please make sure the power off before operation, Installation must be performed by skilled electrician who are familiar with the requirements and proper installation methods of LED luminaire, in order to avoid damage or hazard;The external flexible cable or cord of this luminaire can not be replaced, if the cord is damaged, the luminaire must be destroyed,The light source contained in this luminaire shall only be replaced by a qualified person;