




TPA SERIES LED Tri-proof lamp



www.seekingled.com

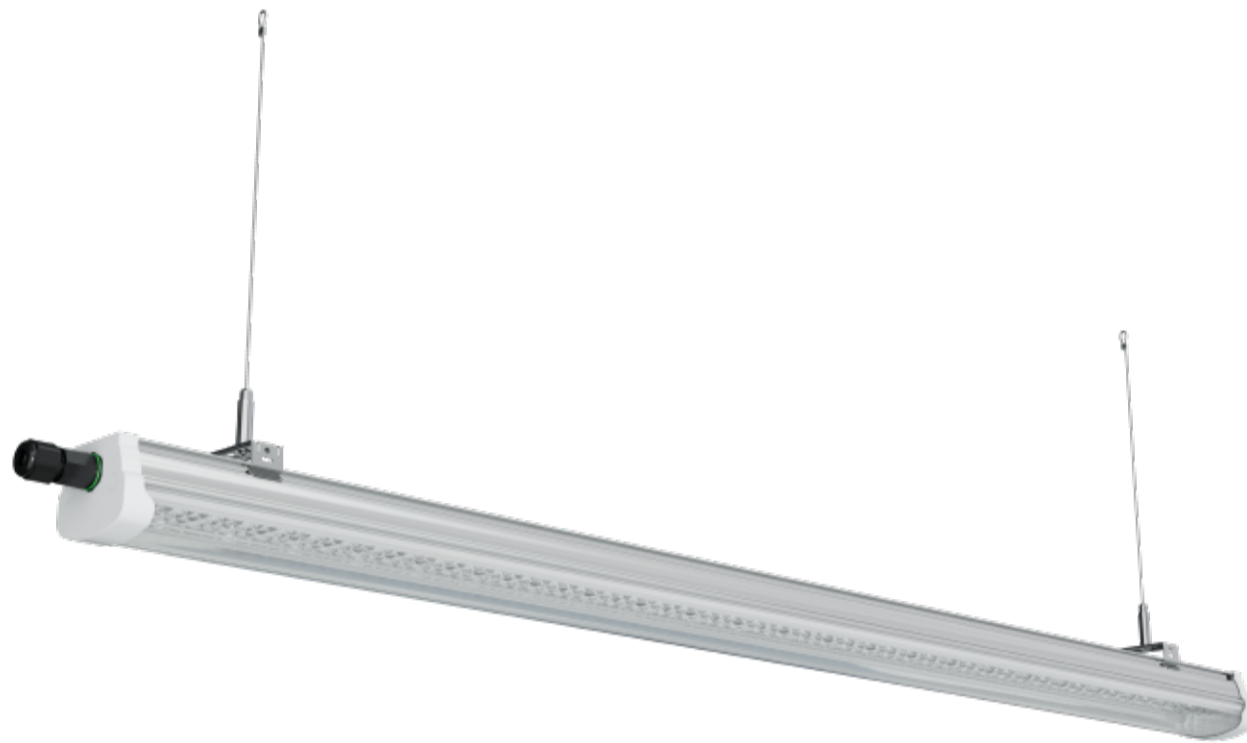

165-175lm/w 30W/60W/75W 60°/90°/270°

TPA SERIES LED Tri-proof lamp is equipped with an optical lens, the light effect is much higher than the traditional tri-proof lamp, and the hole-free sealing design prevents corrosion, dust, dirt, insects, moisture and bacteria. The tool-free terminal design makes installation more convenient, and with the induction function and emergency lighting, it is better suitable for lighting in various places, such as factory workshops, underground parking lots, subways, cold storages, shopping malls, supermarkets, textile factories, anti-corrosion and other places.



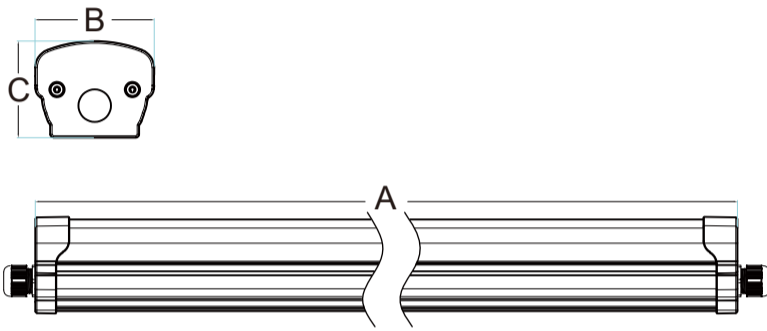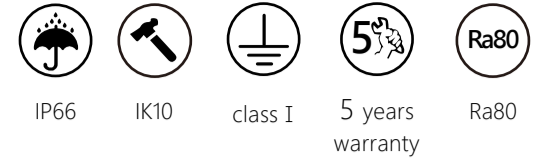

Product size

| Item | A(mm) | B(mm) | C(mm) |
|-----------|-------|-------|-------|
| XJ-TPA30W | 600 | 74 | 60 |
| XJ-TPA60W | 1200 | 74 | 60 |
| XJ-TPA75W | 1500 | 74 | 60 |


Parameter

| Model NO. | Power (W) | Luminous flux 145-155lm/w (270°) 165-175lm/w (60°/ 90°) |
|-----------|-----------|---|
| XJ-TPA30W | 30W | 4350-4650 4950-5250 |
| XJ-TPA60W | 60W | 8700-9300 9900-10500 |
| XJ-TPA75W | 75W | 10875-11625 12375-13125 |




| | |
|-----------------------|-------------------------------|
| AC Input : | 200-240V 50/60Hz |
| Brand of LED Driver : | TRIDONIC |
| Light Source : | 2835 |
| CRI Range : | Ra>80 |
| CCT Range : | WW(3000K) NW(4000K) CW(5700K) |
| Light Efficiency : | 145-175±5% Lm/W |
| Beam Angle : | 60°/90°/270° |
| Housing : | Aluminum Alloy+PC |
| Waterproof : | IP66 & IK10 |
| L80B20@25°C: | >100000H |
| PF: | ≥0.95 |
| THD: | <15% |
| Power Efficiency: | ≥0.9 |
| Certifications: | CE, CB |
| Warranty : | 5 Years |
| Light body color: | White Aluminum (RAL 9006) |

XJ - TPA 75W- *


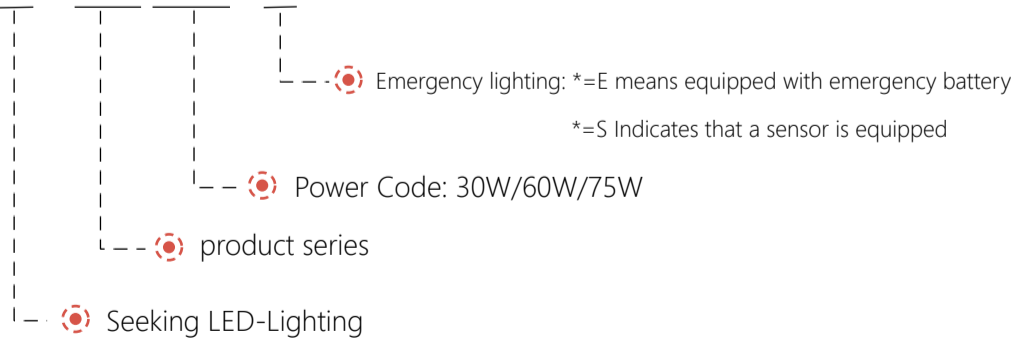


★ Above lumens based on 4000K Ra:80

standard:

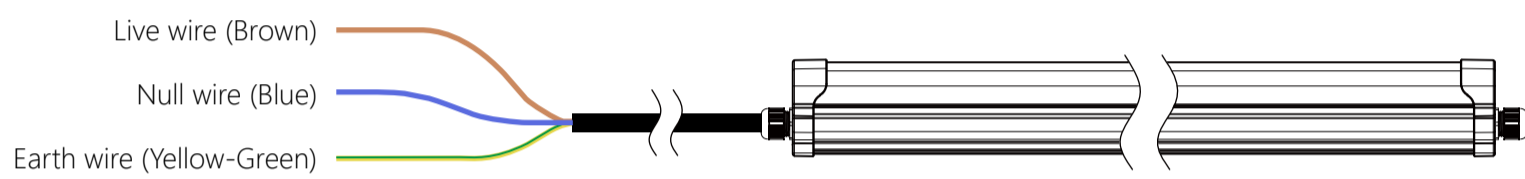

DALI/0-10V dimming:

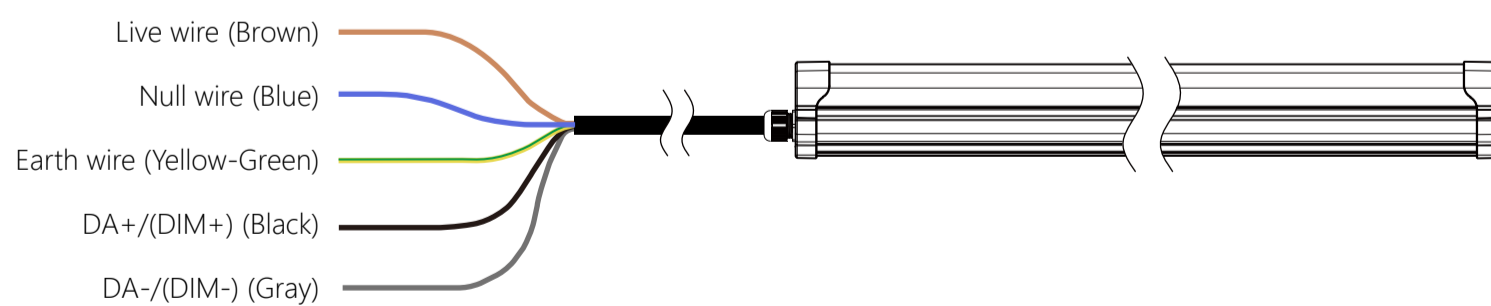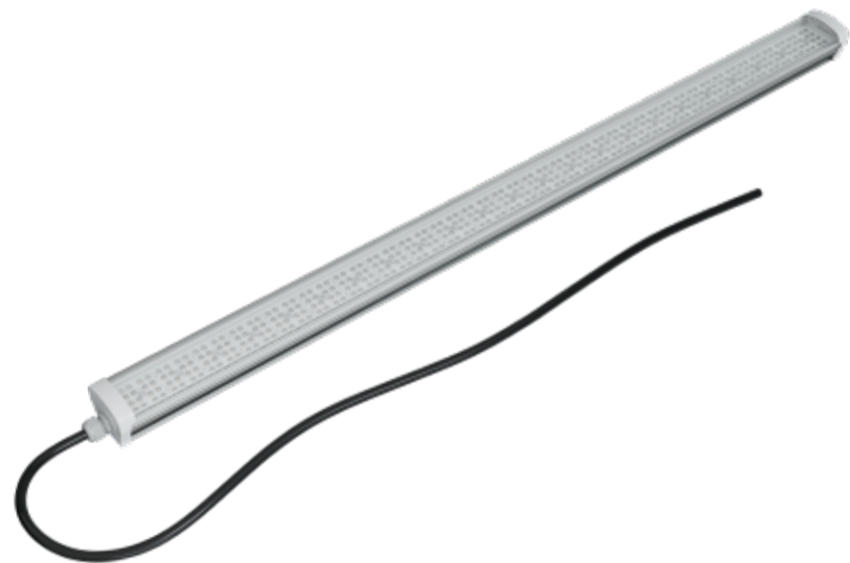

Emergency Lighting:



LED indicator status display:

- | color | state |
|--------------------------------------|---|
| ● | Green steady: Charging mode |
| ○ | green lights off: Discharging mode or main power disconnected |




Power 15W




3 hours battery life




When AC power is lost, the luminaire will automatically switch to the emergency power supply to supply the lighting load at the rated emergency power. When AC power is restored, the emergency battery will automatically switch back to normal operation mode and resume battery charging.

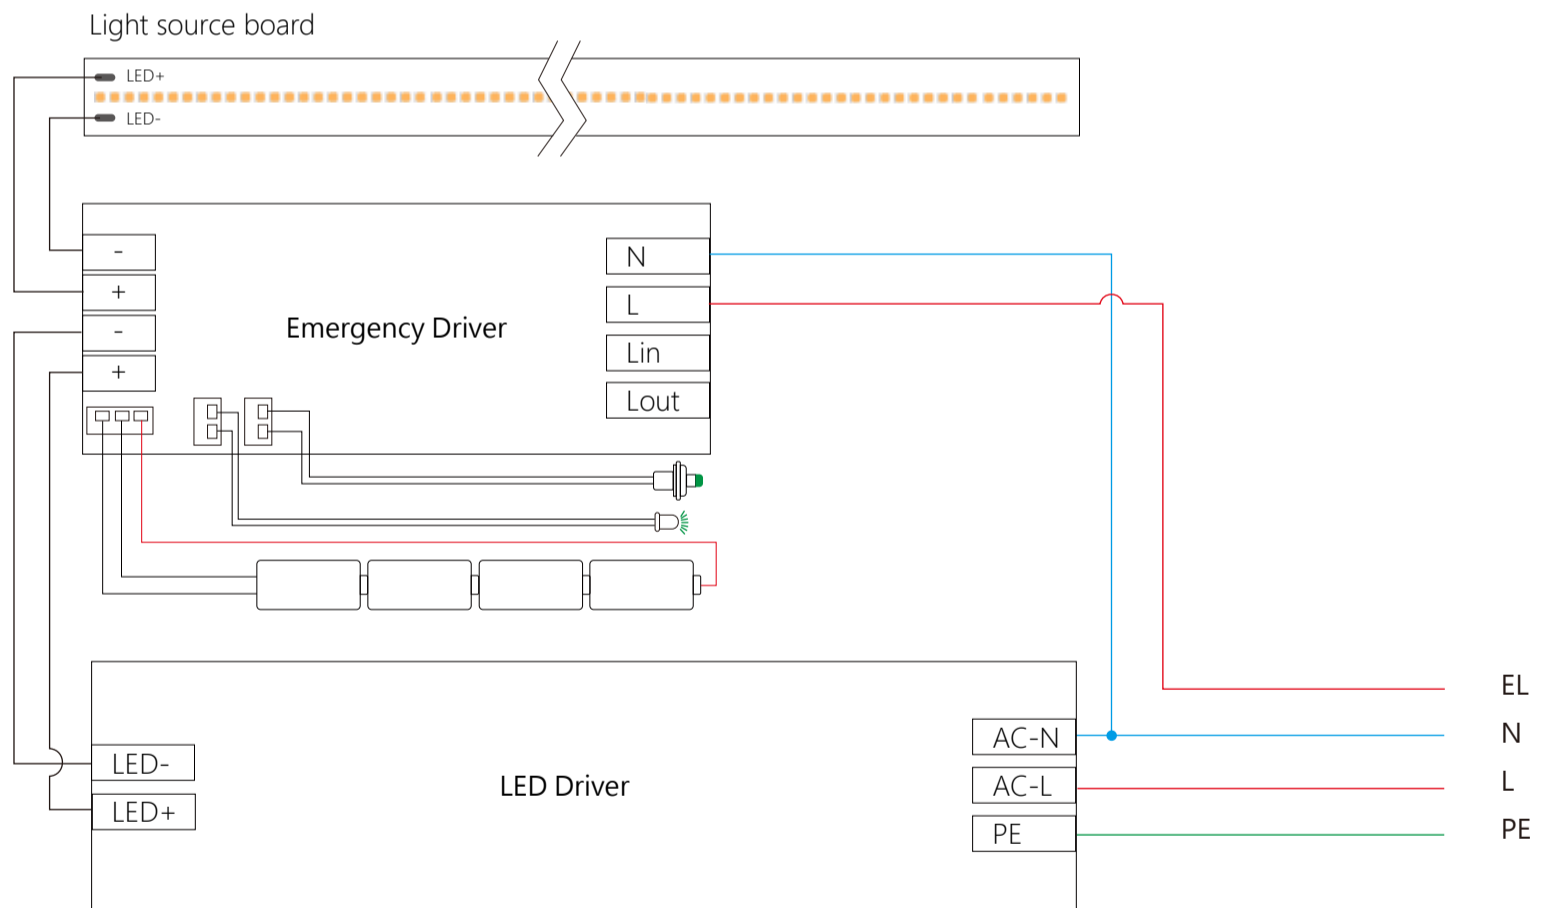


Sensor function:



Equipped with daylight sensor and microwave sensor, Different from manual switch dimming, the use of sensor module can realize automatic dimming of the system, which is efficient and energy-saving. It is suitable for warehouses, corridors and garages.

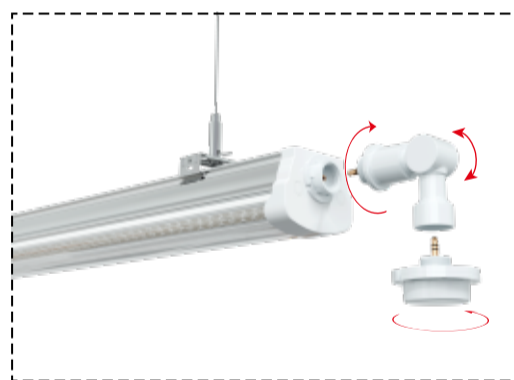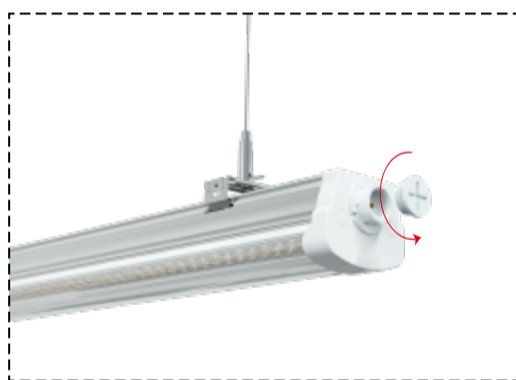
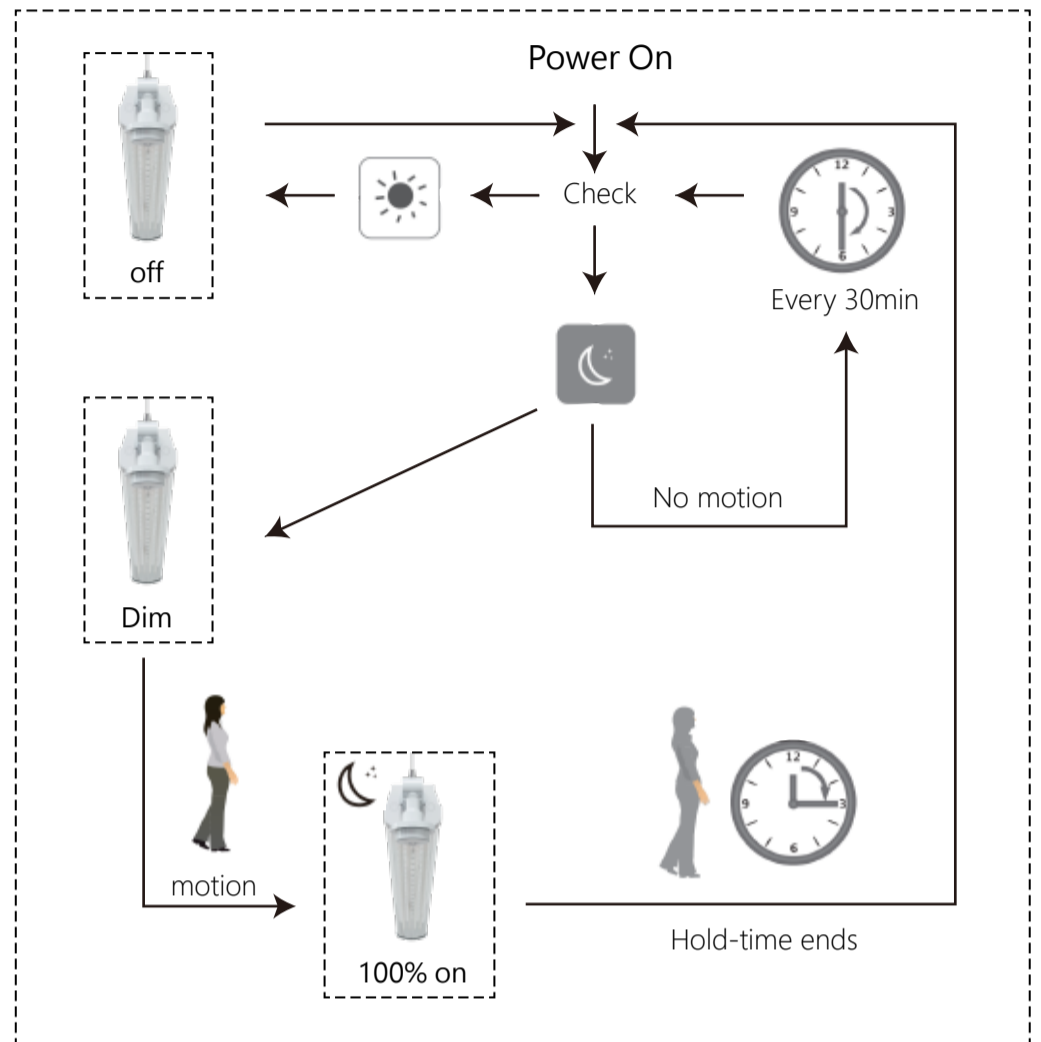


NOTE: Warm up time is 15seconds. After the sensor connects input power first time, the light will keep on 15seconds, then go to dimming to work normally.
 NOTE: Factory Default Setting: 100% sensitivity, Hold on time: 5min, Daylight sensor is ☀, Dimming level: 30%, Dimming time: 60 minutes.
 NOTE: Any setting changed by remote control, the led light that sensor connect will on/off as confirm.

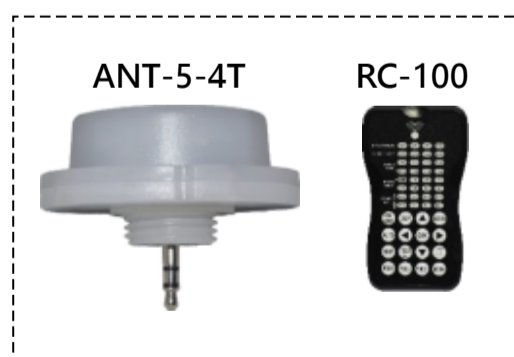

For more information about the sensor, Please read the sensor's Supplementary documents. or consult our sales staff.

Available Quantity in Series Connection:

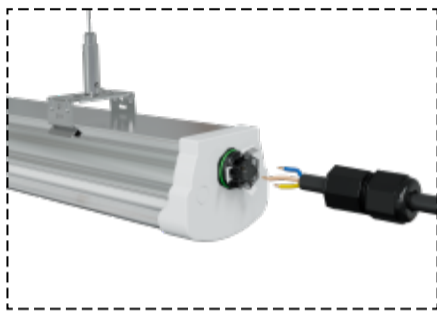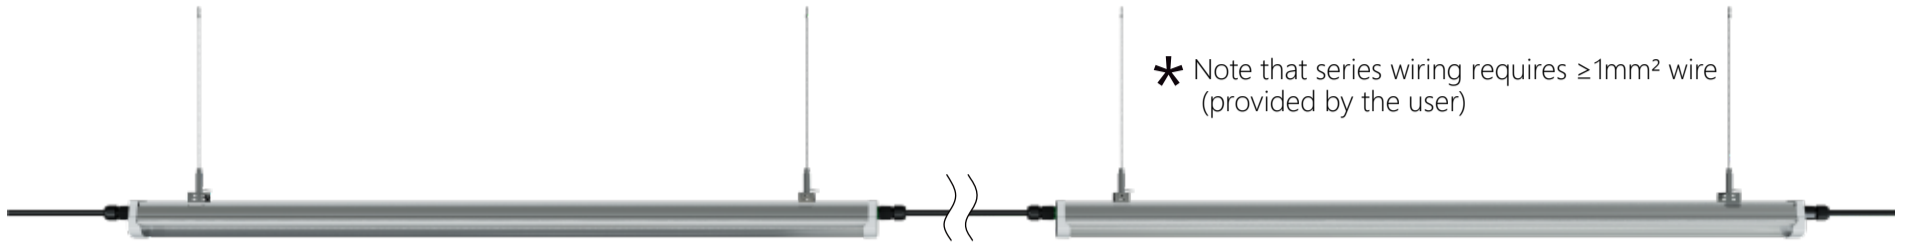


Tool-less terminal blocks

1. Cable requirements : $\geq 3 \times 1.0\text{mm}^2$
2. Solid cable-end
3. Wire stripping 10-12mm


| Power (W) | Input Voltage (V) | Maximum Quantity Connecting in Series |
|-----------|-------------------|---------------------------------------|
| 30 | 220 | 33pcs |
| 60 | 220 | 16pcs |
| 75 | 220 | 13pcs |

Product Packaging :

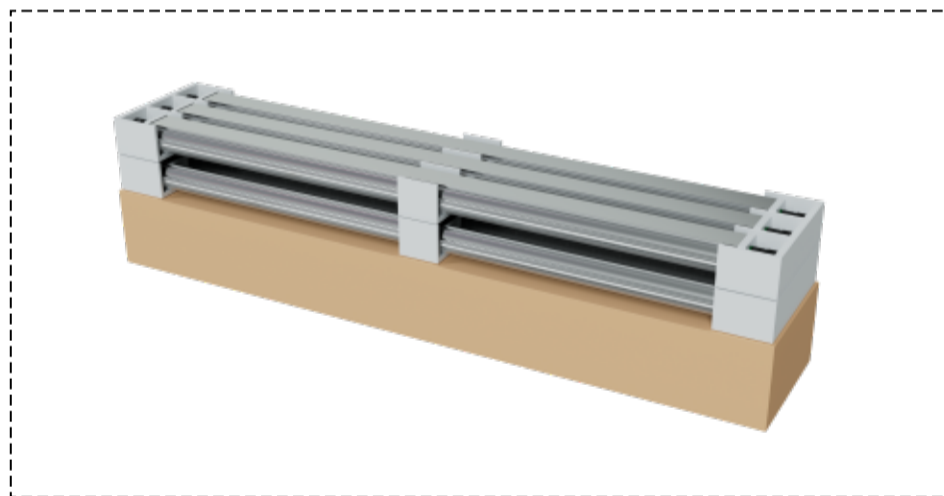


| Model | Qty | N.W.(kg) | G.W.(kg) | Meas(mm) |
|-------------|---------|----------|----------|--------------|
| XJ-TPA30W | 6PC/ctn | 1.4 | 9.8 | 740*292*150 |
| XJ-TPA60W | 6PC/ctn | 1.9 | 12.9 | 1340*292*150 |
| XJ-TPA60W-E | 6PC/ctn | 2.45 | 16.3 | 1340*292*150 |
| XJ-TPA75W | 6PC/ctn | 2.1 | 14.6 | 1640*292*150 |
| XJ-TPA75W-E | 6PC/ctn | 2.65 | 17.7 | 1640*292*150 |

Installation method:

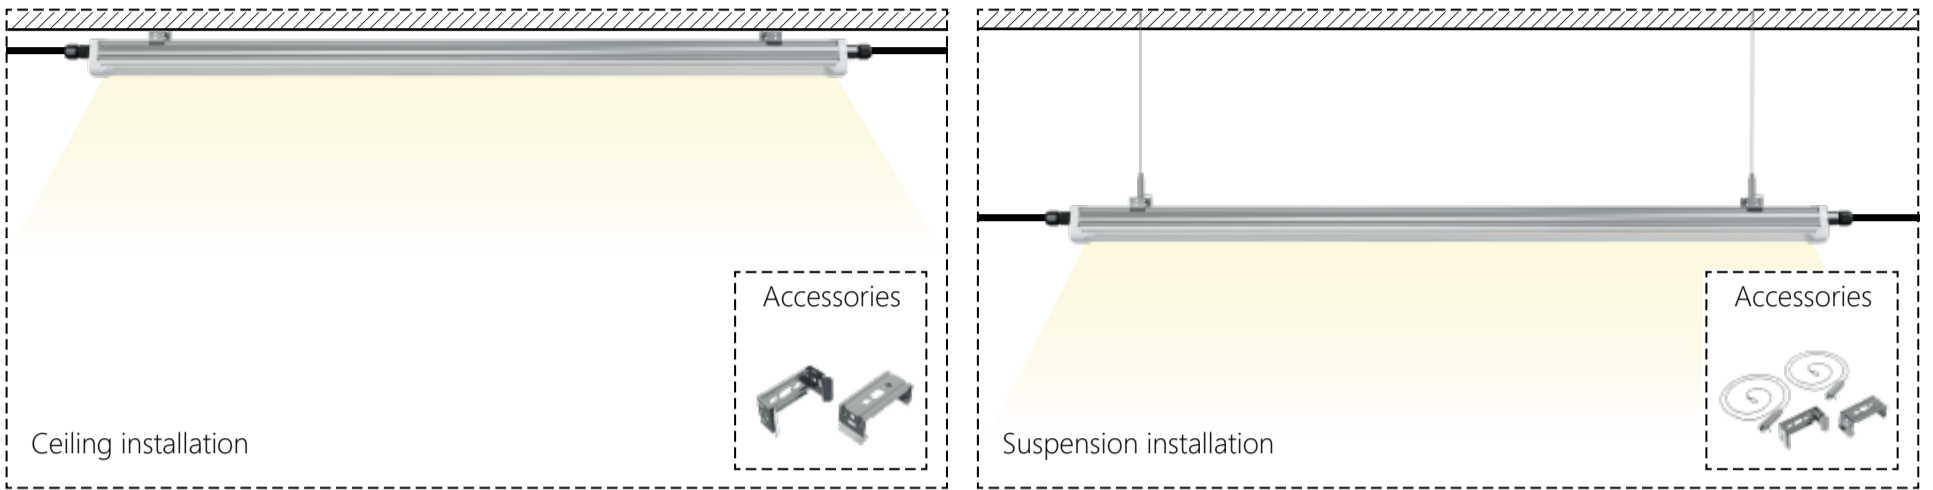

Product Installation Instructions:

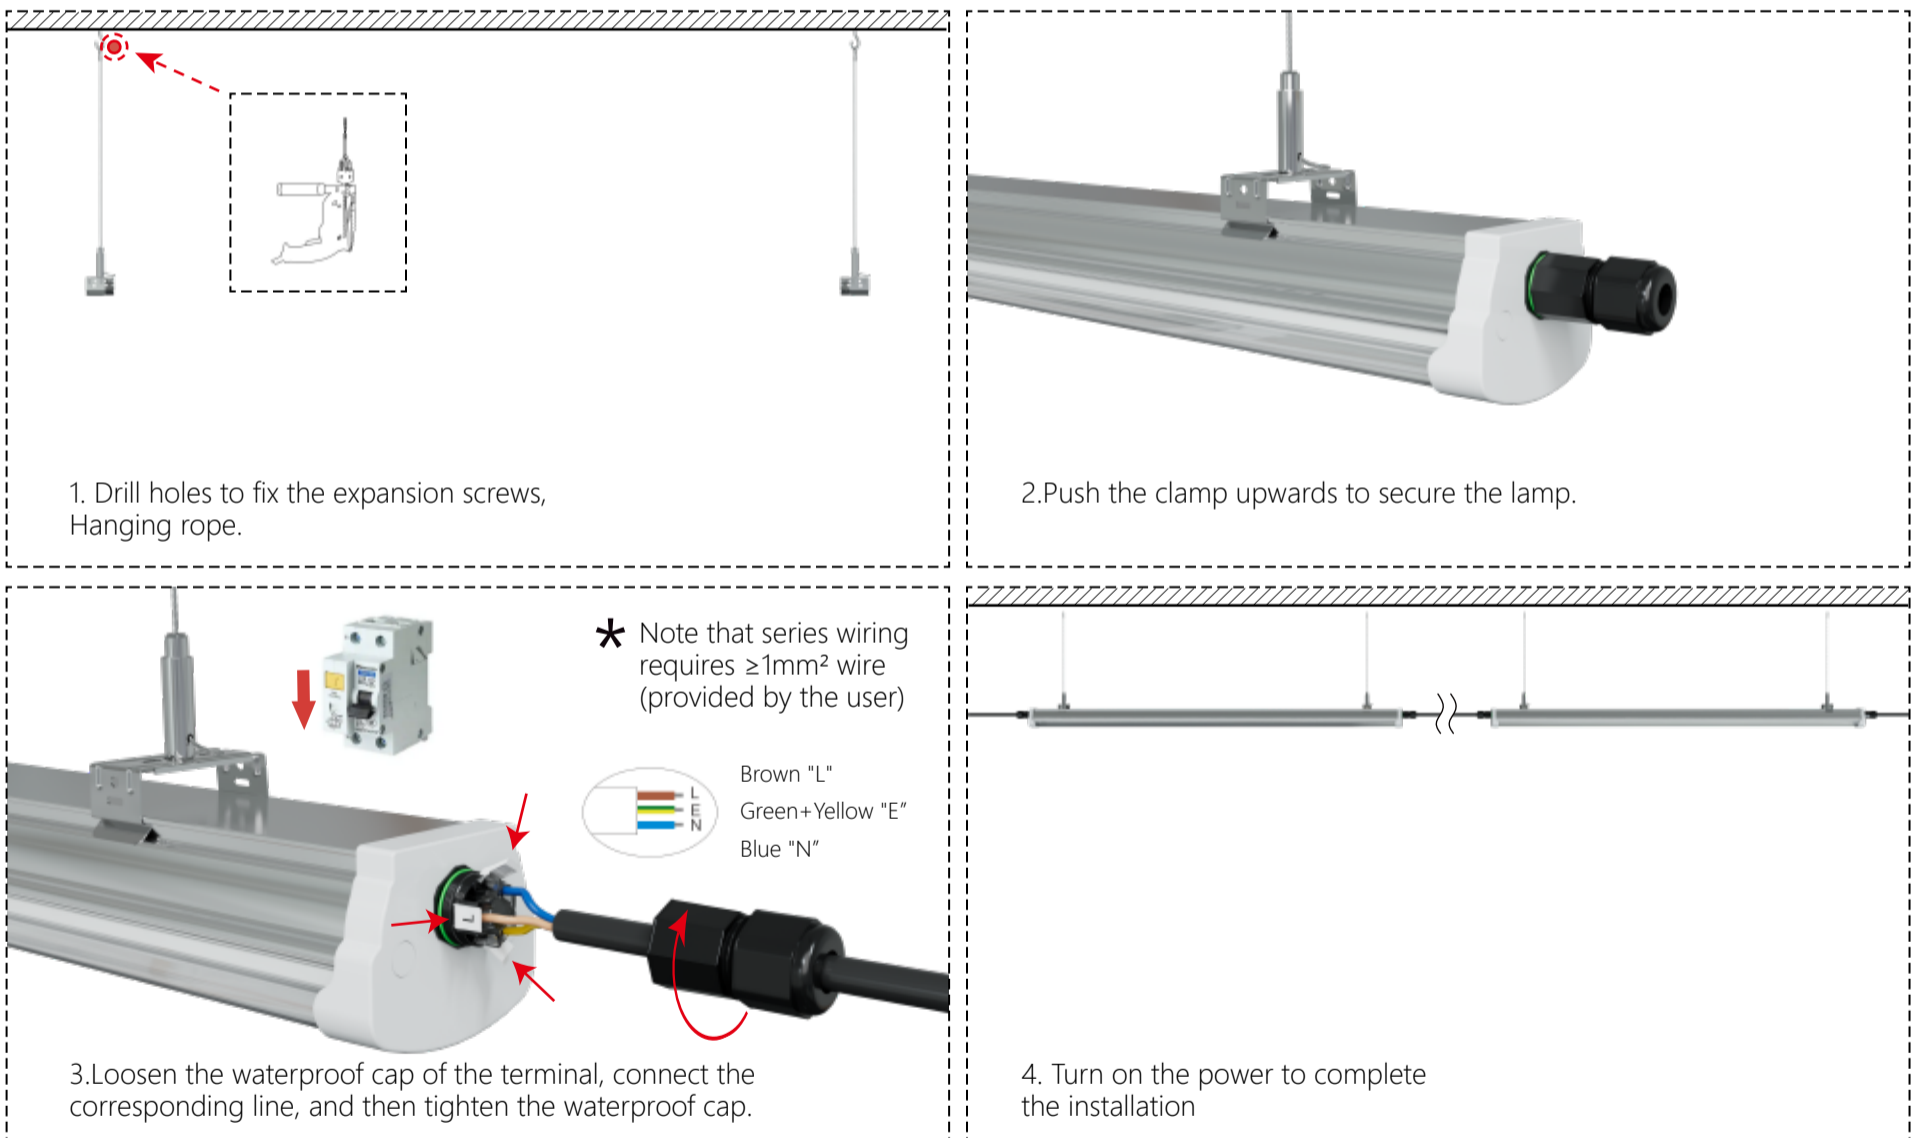

* Note : Please make sure the power off before operation, Installation must be performed by skilled electrician who are familiar with the requirements and proper installation methods of LED luminaire, in order to avoid damage or hazard;