




TFD(SAGITTARIUS) SERIES SPORT STADIUM LIGHT


www.seekingled.com




170lm/w 250W/500W/750W/1000W 20°/40°/60°/90°/P50

Sagittarius series High Mast lighting provide solutions for sports lighting and high-pole lighting, and provide various light distribution designs from different angles to meet the lighting needs of different occasions, The protection arade reaches IK08 and IP66, Constant current power driver anti-surge voltage up to 10KV,L80B20 can reach more than 100000 hours.

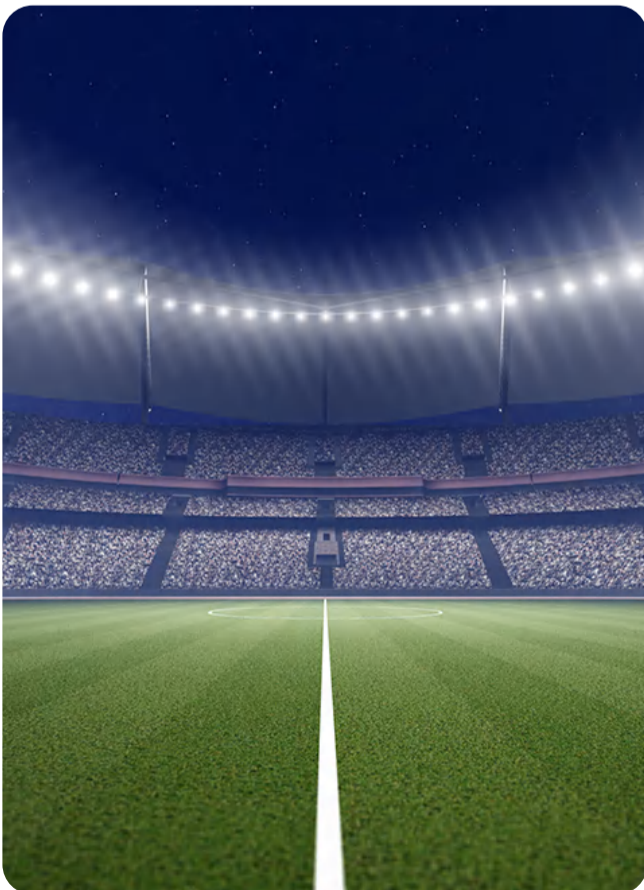


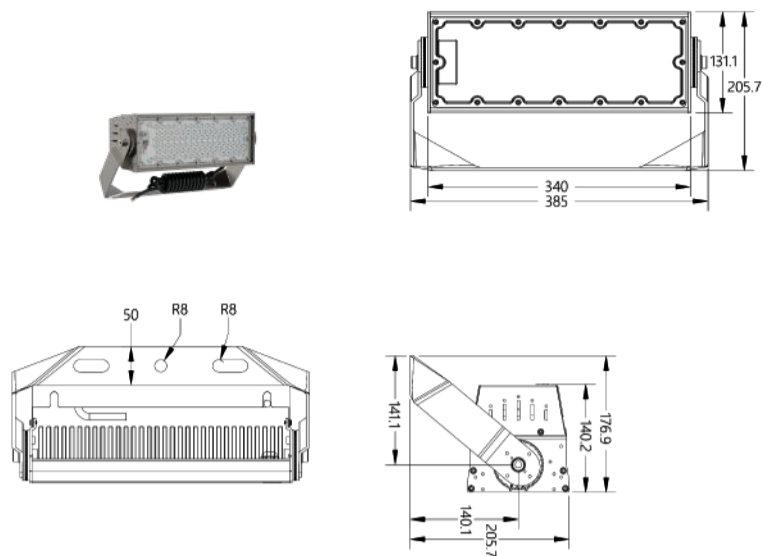


XJ-TFD250W

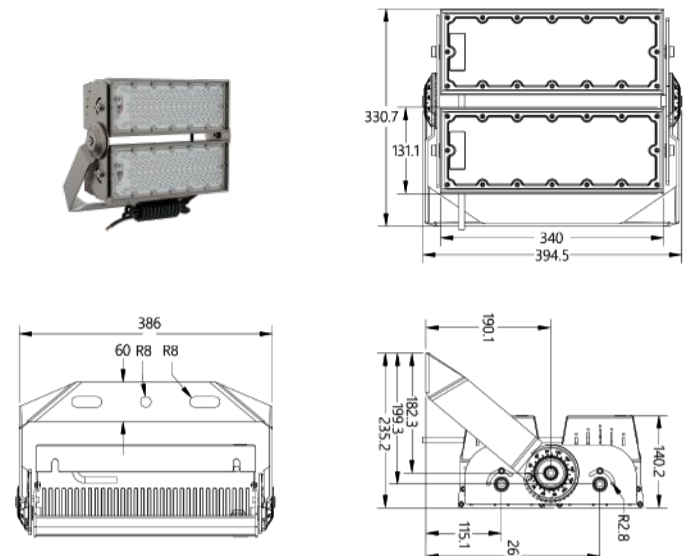

XJ-TFD500W

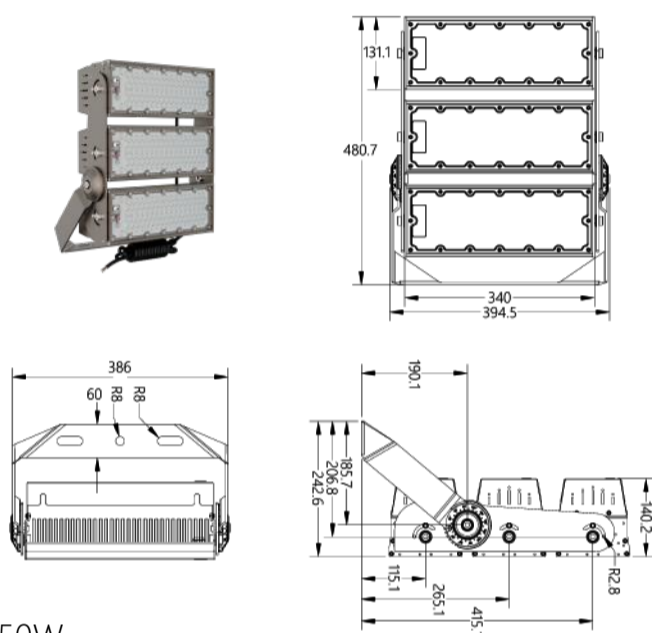

XJ-TFD750W

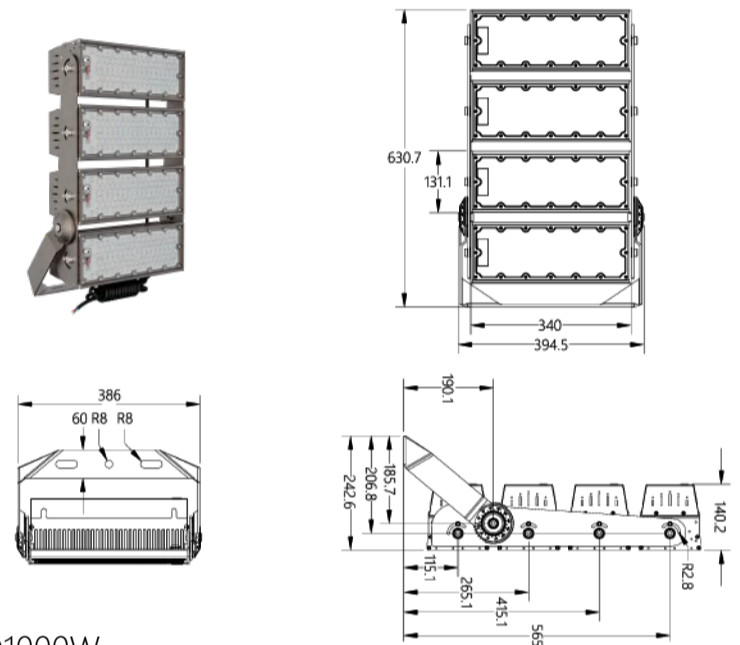


XJ-TFD1000W




Parameter

Model NO.	Power (W)	Luminous flux 170lm/w
XJ-TFD250W	250	42500
XJ-TFD500W	500	85000
XJ-TFD750W	750	127500
XJ-TFD1000W	1000	170000

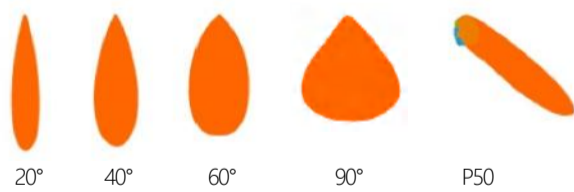AC Input :	200-240V 50/60Hz
Brand of LED Driver :	SOSEN (Isolated driver)
Light Source :	5050
CRI Range :	Ra>70
CCT Range :	NW(4000K) CW(5700K) WW(3000K)(Optional) Dw(5000k)(Optional)
Light Efficiency :	170+5% Lm/W
Beam Angle :	20°/ 40°/ 60°/ 90°/ P50
Housing :	Aluminum Alloy
Surge Protection :	10kV
Waterproof :	IP66 & IK08
L80B20@25°C:	>100000H
PF:	≥0.95
THD:	<15%
Power Efficiency:	≥0.9
Certifications:	CE, CB
Warranty :	5 Years
Light body color:	White Aluminum(RAL 9006)



XJ - TFD 1000W

-  Power Code: 250W / 500W / 750W / 1000W
-  product series
-  Seeking LED-Lighting



Dimmable

Mounting accessories:




A06



A07


accessories	image	material	dimensions	weight	accessoryuse
Optional	A06	Aluminium	Φ30x120mm	200g	Lamp angle positioning
Standard	A07	SUS304	Φ5x1000mm	0.6kg	Increase the safety performance

Product Packaging :

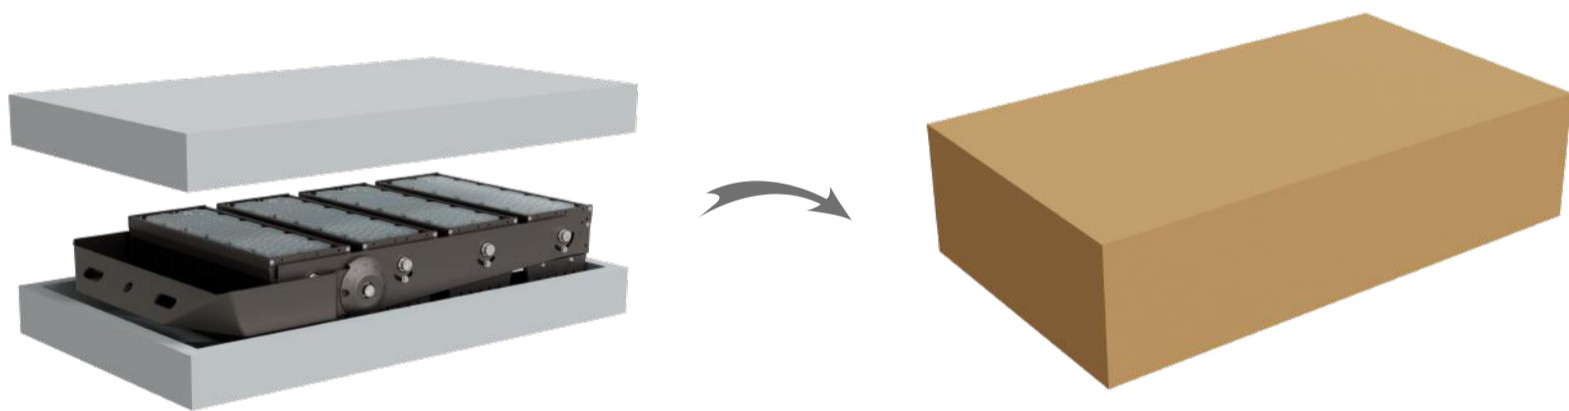


Model	Qty	N.W.(kg)	G.W.(kg)	Meas(mm)
XJ-TFD250W	1PC/ctn	5.1	6.1	477*325*206
XJ-TFD500W	1PC/ctn	8.3	9.5	459**447*206
XJ-TFD750W	1PC/ctn	11.2	14.5	609*447*206
XJ-TFD1000W	1PC/ctn	14.2	15.7	759*447*206

Installation method:

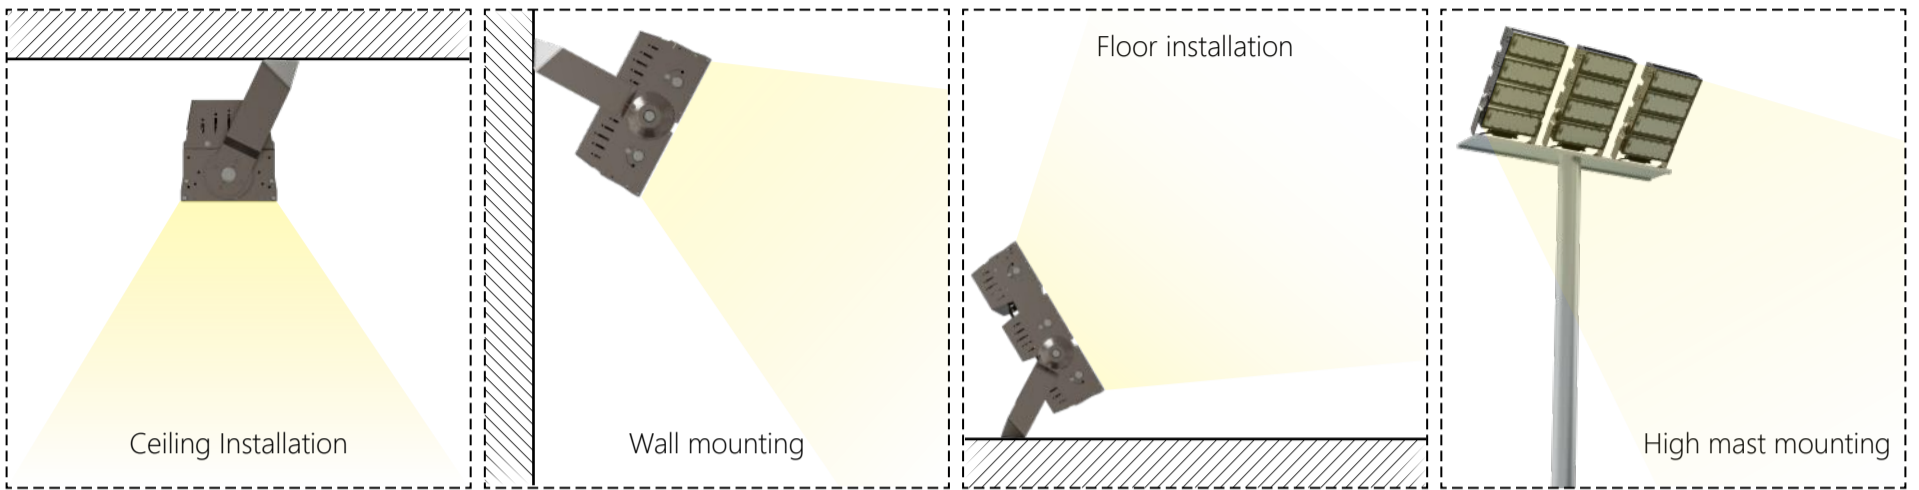

Product Installation Instructions:

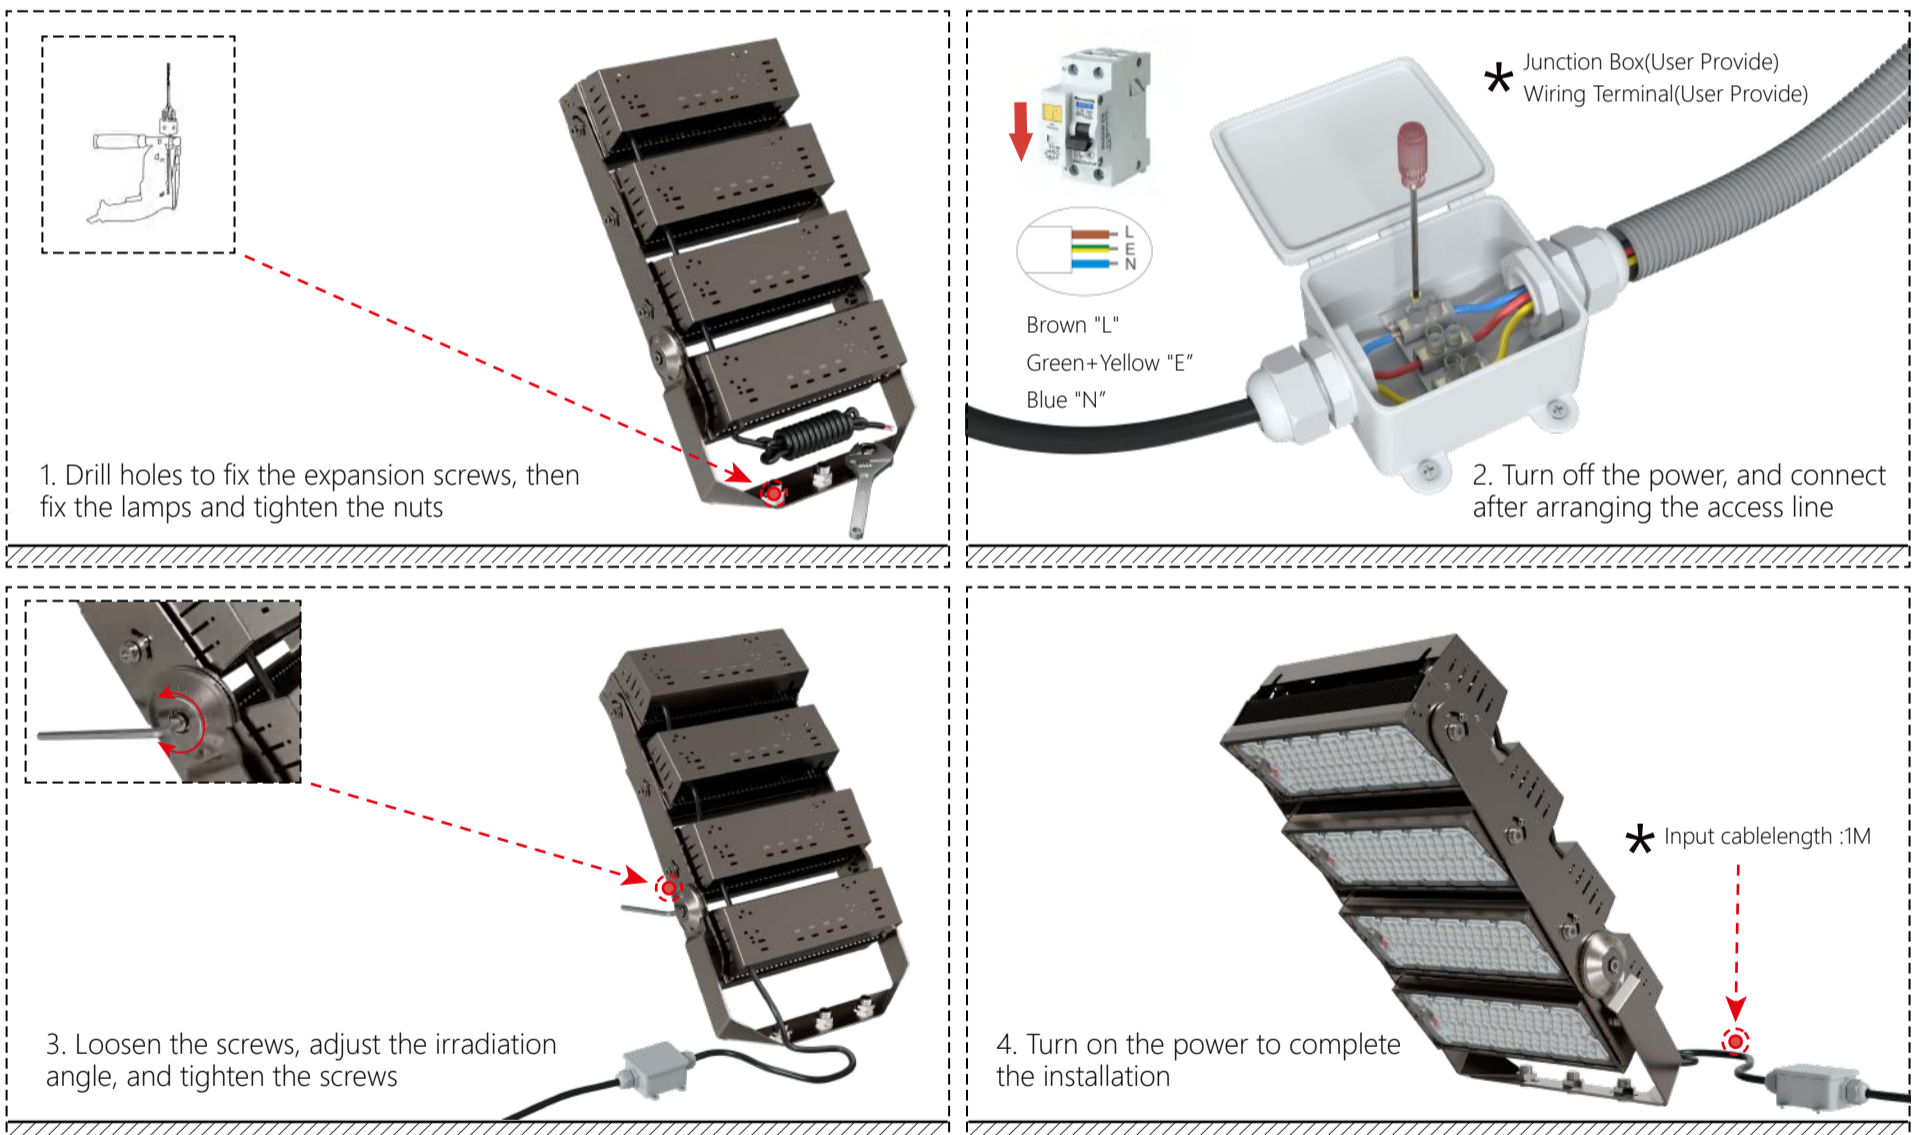

* Note : Please make sure the power off before operation, Installation must be performed by skilled electrician who are familiar with the requirements and proper installation methods of LED luminaire, in order to avoid damage or hazard;The external flexible cable or cord of this luminaire can not be replaced, if the cord is damaged, the luminaire must be destroyed,The light source contained in this luminaire shall only be replaced by a qualified person;